

北京天华中威科技有限公司

TSP-060068M3-VD-4 宽带移相器 技术说明书



电话	86-010-84164383
传真	86-010-84164373
地址	北京市朝阳区望京东路8号锐创国际中心B座11层
网址	www.798techway.com

同轴

数字移相器

TSP-060068M3-VD-4


50 Ω 0.06 to 0.068 GHz

Features

- 宽带: 0.06~ 0.068 GHz
- 低插入损耗: \leq 4 dB
- 抑制: 4 Bit
- 相位变化范围 360°

应用

- 电子战接收机
- 气象及军用雷达
- 通讯卫星
- 波束形成模块
- 相取消

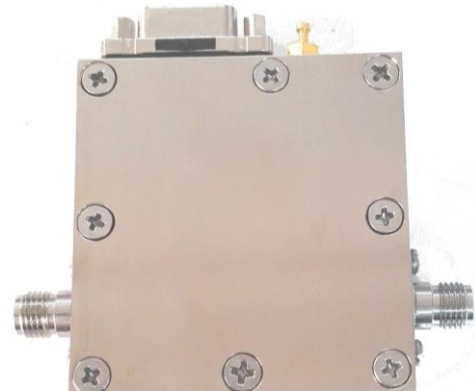

技术指标

TA=+25 $^\circ$ C Vdd=+5V Vc=0/+5V 50 Ohm System

指标参数	条件	最小值	典型值	最大值	单位
频率范围		0.06	-	0.068	GHz
插入损耗	全频率范围	-	4	-	dB
入口回波损耗	全频率范围	-	2.5	3.0	:1
出口回波损耗	全频率范围	-	2.5	3.0	:1
位相位误差	全频率范围	-	+/- 2.0		deg
均方值误差		-		5.0	deg
输入压缩 P1dB			23		dBm
位控制电压		0	-	5	V
电压/电流	5V	-	-	20	mA



Beijing Tian Hua Zhong Wei Co., Ltd

☎ Phone 86-010-84164383 Fax 86-010-84164373 🌐 www.798techway.com

✉ Address F11, Building B, Ruichuang International Center, No. 8, Wangjing East Road, Chaoyang District, Beijing
, Postal code 100102


同轴

数字移相器


TSP-060068M3-VD-4

50 Ω 0.06 to 0.068 GHz

外形尺寸图

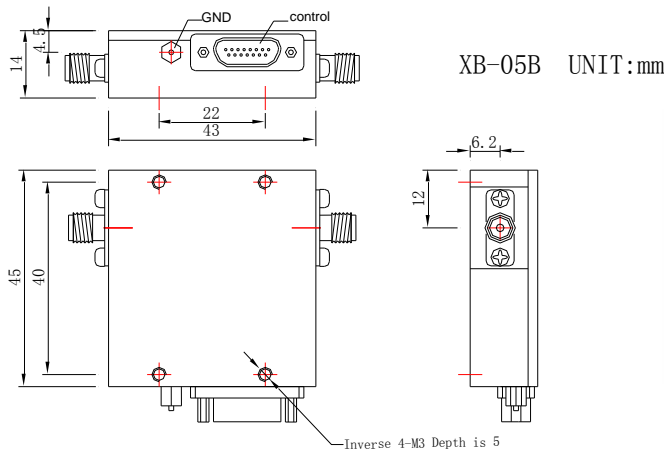

控制图

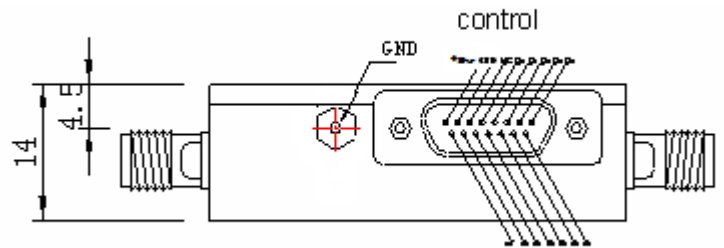

操作温度	-40°C to 70°C
储存温度	-55°C to 100°C
电源电压 (max)	5V
控制电压 (max)	5.0 V
最大入口功率	23 dBm

极限参数

State	Voltage
Low(0)	0 to +0.5V
High(1)	+3 to +5V(Note 5)

Note 5: 内置上拉电阻 (约500 kΩ), 悬空时代表High

超出该极限值有可能对器件造成损坏!

典型曲线图

Control Voltage Input					Phase Shift (Degrees) RFIN - RFout
D4	D3	D2	D1	D0	
1	1	1	1	1	Reference*
1	1	1	1	0	11.25
1	1	1	0	1	22.5
1	1	0	1	1	45.0
1	0	1	1	1	90.0
0	1	1	1	1	180.0
0	0	0	0	0	337.5



Beijing Tian Hua Zhong Wei Co., Ltd

Phone 86-010-84164383 Fax 86-010-84164373 www.798techway.com

Address F11, Building B, Ruichuang International Center, No. 8, Wangjing East Road, Chaoyang District, Beijing, Postal code 100102