



## HCH255J-25527K1-15

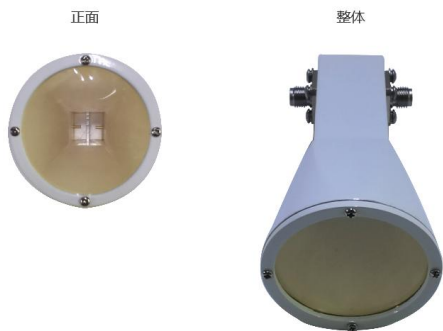

### 外形尺寸

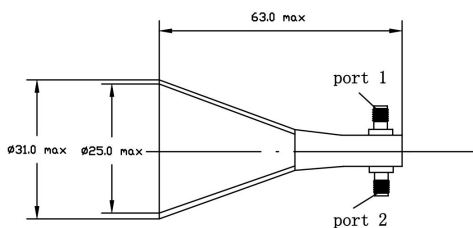

UNIT: mm (单位: mm)

■ 工作频率	25.5 - 27.0GHz
■ 驻波	1.50 max
■ 轴比	1.5 dB max

### 技术指标@25°C

工作频率	25.5 - 27.0GHz
增益	15.0 dB ± 0.5 dB @ 25.5 GHz左旋极化
	15.0 dB ± 0.5 dB @ 25.5 GHz右旋极化
	15.5 dB ± 0.5 dB @ 26.25 GHz左旋极化
	15.5 dB ± 0.5 dB @ 26.25 GHz右旋极化
	15.5 dB ± 0.5 dB @ 27.0 GHz左旋极化
隔离度	23 dB min (端口1 - 端口2)
	31° (E Plane) and 33° (H Plane)@25.5GHz左旋极化
Beam W (-3dB波瓣宽度)	31° (E Plane) and 33° (H Plane)@25.5GHz右旋极化
	31° (E Plane) and 32° (H Plane)@26.25GHz左旋极化
	31° (E Plane) and 32° (H Plane)@26.25GHz右旋极化
	31° (E Plane) and 31° (H Plane)@27.0GHz左旋极化
	31° (E Plane) and 31° (H Plane)@27.0GHz右旋极化
	31° (E Plane) and 31° (H Plane)@27.0GHz右旋极化
接口	端口1 (左旋极化端口, 2.92(阴)) 端口2 (右旋极化端口, 2.92(阴))
材料	铜材料, 镀银
工作温度	-40~85°C

### 订单描述

HCH255J-25527K1-15

指标特性

